CP(T)

沉水式污物（泥）泵

CP(T) SERIES SUBMERSIBLE SOLID HANDLING PUMP

川源股份有限公司

GSD INDUSTRIAL CO., LTD.

ISO 9001

CP(T)沉水式污物(泥)泵

簡　介

CP(T)系列沉水式污物泵採不阻塞葉輪設計，適合輸送含各種固體顆粒或少量纖維的污水，可有效降低葉輪堵塞的機率。其適用範圍寬，流量爲0.2m³/min~ 60 m³/min，出口徑爲φ50mm ~ φ600mm。特點爲效率高、性能穩定、低噪音及低振動，可搭配自動著脫裝置及水位控制系統，不僅安裝保養容易，亦可依現場實際需求進行自動控制，目前已廣泛用於多種場合。

用　途

－廢水揚水站
－污水處理廠
－化糞池排水系統
－農畜牧業廢水處理系統
－醫院、學校、社區等生活廢水處理系統
－食品、造紙、採礦、紡織等工業之水處理系統
－淨水處理系統

結構特點

電動機

1．產品標準：採F級絕緣之乾式鼠籠型感應式電動機，防護等級IP68。
2．當產品使用於易生沼氣或有爆炸性危險的場合，請依法令規定指定配置[耐壓防爆型電動機]，川源公司沉水式耐壓防爆型電動機已依CNS標準通過測試驗證。（詳：川源公司沉水耐壓防爆電動機型錄）

電動機冷卻方式

1．產品標準：採標準型，利用周圍的液體強制冷卻。
2．當產品使用於可能水位偏低（低於泵浦最低水位要求）的場合可指定電動機應配置下列二種冷卻方式之一，以避免因冷卻不足造成電動機燒毀。
   a.水冷式：泵浦運轉時液體由冷卻水管進入馬達本體與水套間，以水流帶走電動機所產生的熱。
   b.油冷式：電動機內加入絕緣冷卻油，並設置熱交換系統，以循環冷卻油帶走電動機所產生的熱。

不阻塞型葉輪

所有葉輪均經平衡校正，運轉平穩；特殊設計使其流道特大，水流順暢污物容易通過，毋慮阻塞或之情況發生。

泵浦本體

泵體出口處加裝自動排氣閥，避免氣栓現象發生，使抽水系統穩定。

密封機構

電纜組爲多層防護並添加環氧樹脂密封；機械軸封則是採雙機械軸封隔絕抽送液體洩漏與電動機部分接觸，進而雙重保護電機。

自動著脫裝置（選用配備）

使泵浦安裝、保養、修護迅速容易，毋須先清除桶槽污水。

線圈過熱保護裝置

（選用配備，≦2.2KW 4P為標準配備）

電動機加裝過熱保護裝置，對過載、溫升異常等狀況自動進行檢測並做適當保護措施，延長使用壽命，且減少電動機燒毀。

測漏檢知器（選用配備）

在油室內加裝測漏檢知器，減少因密封不良或軸封損壞造成之洩漏。並可大幅降低電動機燒毀之情形發生。

INTRODUCTION

CP(T) series submersible solid handling pump is specifically designed non-clog impeller for delivery of the waste water. It can deliver sewage containing solid particles and few fibers and keep the impeller from clogging. The delivered capacity can vary from 0.2m³/min to 60m³/min, and discharge diameter varies from φ50mm to φ600mm. CP(T) series pumps are high-efficiency, stable performance, low noise and vibration. The pump can be installed with the auto-setter to make maintenance easier. In addition, to be installed with the float switch can operate the pump automatically.

APPLICATIONS

— Wastewater pumping station
— Urban wastewater treatment plant
— Builbing wastewater treatment system
— Animal husbandry and farm wastewater treament system
— Waste water system in hospital, school and community.
— Wastewater treatment in food, paper, mining, textile, leather, industry.
— Water purification system

FEATURES

MOTOR

1. Motor Standard：Squirrel cage; dry motor with F class insulation and IP 68 protection level.
2. If the pump is installed in the area easily to generate the marsh gas or explosive medium Please select the appropriate explosion-proof motor (explosion-proof motor follows the Ex d II G4 regulation)

— GSD SM series submersible explosion-proof motor has passed the CNS standard and testing identification (please refer to the GSD SM series catalogue)

Motor cooling system

1. Cooling system Standard：the pump is cooled by surrounding liquids
2. IF the pump may operate in the low water level, the following two cooling systems can prevent motor from burn out because of less cooling.
   a. Cooling jacket system：When the pump under operating, the liquid will enter the cooling jacket to take away the heat of motor.
   b. Oil circulation cooling system： Filling the insulating oil in the motor and build in the heat exchanging system, the heat of motor will be taken away by insulating oil circulation when the pump operates.

NON-CLOG IMPELLER

Non-clog impeller is designed to allow solid and sewage passage easier without clog. Impeller static and dynamic balancing adjustm ent is tested to ensure operating stability.

PUMP CASING

Build in vent valve at the discharge side of the pump casing to avoid air lock and ensure the pumg system in steady operation.

SEAL MECHANISM

The cables form multiple sealing and epoxy resin; double mechanical seals design provides double protection to prevent the motor from contacting the pumping liquid.

AUTO-SETTER (OPTIONAL)

Auto-setter ensure pump for easier installation, maintenance.

MOTOR STATOR THERMAL PROTECTOR

(OPTIONAL) (Motor≦2.2KW 4P is standard component)

The built-in thermal protector test overload and overheating and then do appropriate protection to decrease motor damage and increase motor life.

LEAKAGE DETECTOR (OPTIONAL)

Built-in leakage detector in the oil chamber can prevent leakage from the damage of the mechanical seal and prevent the motor damage.

版權所有：川源股份有限公司

型號說明 (TYPE DESCRIPTION)

(EX)－CP(T)－5(6) 37－300 A

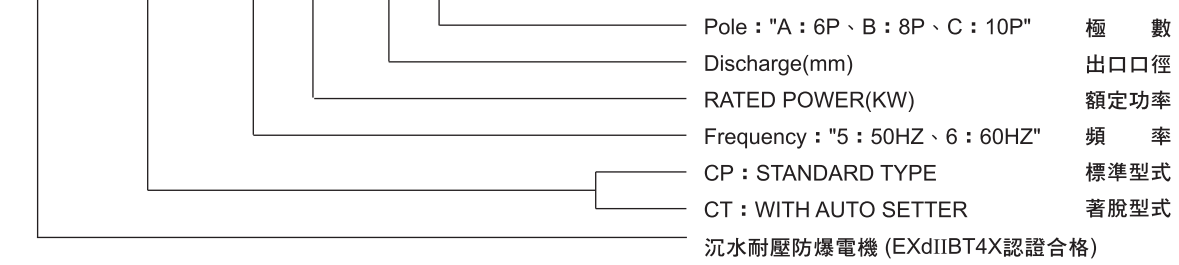

重要聲明：防爆產品必須符合法規並依客戶需求量身製作，除性能外，外型尺寸圖及結構圖請另外索取，
勿直接引用本型錄內容。

只有採用沉水耐壓防爆電機之產品，其型號才會有「 **EX** 」字樣

污物通過粒徑尺寸，詳見各機型單張性能曲線所示。

● Please refer to the specific performance curve for the diameter of waste.

規格表 (SPECIFICATIONS)

機 型	口徑 (mm)	輸出 (kw)	極數 (Pole)	揚程 (m)	流量 (m^3/min)	機 型	口徑 (mm)	輸出 (kw)	極數 (Pole)	揚程 (m)	流量 (m^3/min)
CP(T)-5(6)0.75-50	50	0.75	4	7.5	0.2	CP(T)-5(6)3.7-150A	150	3.7	6	6	2.1
CP(T)-5(6)1.5-80	80	1.5	4	8	0.5	CP(T)-5(6)5.5-150A	150	5.5	6	8	2.5
CP(T)-5(6)2.2-80	80	2.2	4	8.5	0.7	CP(T)-5(6)7.5-150A	150	7.5	6	10	2.5
CP(T)-5(6)3.7-80	80	3.7	4	12.5	0.8	CP(T)-5(6)5.5-200A	200	5.5	6	5.5	4
CP(T)-5(6)5.5-80	80	5.5	4	18	0.8	CP(T)-5(6)7.5-200A	200	7.5	6	7	4
CP(T)-5(6)7.5-80	80	7.5	4	22	0.8	CP(T)-5(6)11-200A	200	11	6	10.5	4
CP(T)-5(6)3.7-100	100	3.7	4	8	1.5	CP(T)-5(6)15-200A	200	15	6	12	4.5
CP(T)-5(6)5.5-100	100	5.5	4	12.5	1.5	CP(T)-5(6)15-250A	250	15	6	8.5	7
CP(T)-5(6)7.5-100	100	7.5	4	15	1.6	CP(T)-5(6)19-250A	250	18.5	6	9.5	7
CP(T)-5(6)11-100	100	11	4	21.5	1.6	CP(T)-5(6)37-250A	250	37	6	18	7.5
CP(T)-5(6)15-100	100	15	4	26.5	1.6	CP(T)-5(6)45-250A	250	45	6	22	7.5
CP(T)-5(6)19-100	100	18.5	4	30	1.6	CP(T)-5(6)55-250A	250	55	6	21	9
CP(T)-5(6)22-100	100	22	4	34.5	1.6	CP(T)-5(6)75-250A	250	75	6	26	9
CP(T)-5(6)5.5-150	150	5.5	4	8	2.5	CP(T)-5(6)30-300A	300	30	6	11	10
CP(T)-5(6)7.5-150	150	7.5	4	10	2.5	CP(T)-5(6)37-300A	300	37	6	13	10
CP(T)-5(6)11-150	150	11	4	12.5	3	CP(T)-5(6)45-300A	300	45	6	15	10
CP(T)-5(6)15-150	150	15	4	16	3	CP(T)-5(6)75-300A	300	75	6	20.5	15
CP(T)-5(6)19-150	150	18.5	4	20	3	CP(T)-5(6)90-300A	300	90	6	26.5	15
CP(T)-5(6)22-150	150	22	4	24	3	CP(T)-5(6)110-300A	300	110	6	29.5	15
CP(T)-5(6)30-150	150	30	4	28	3.5	CP(T)-5(6)30-350A	350	30	6	7	16
CP(T)-5(6)11-200	200	11	4	10	4.5	CP(T)-5(6)37-350A	350	37	6	8	16
CP(T)-5(6)15-200	200	15	4	12	4.5	CP(T)-5(6)45-350A	350	45	6	10	16
CP(T)-5(6)19-200	200	18.5	4	14.5	5	CP(T)-5(6)55-350A	350	55	6	12	16
CP(T)-5(6)22-200	200	22	4	16	5	CP(T)-5(6)110-400A	400	110	6	18	25
CP(T)-5(6)30-200	200	30	4	21	5	CP(T)-5(6)150-400A	400	150	6	26	25
CP(T)-5(6)37-200	200	37	4	25	5	CP(T)-5(6)22-300B	300	22	8	10	10
CP(T)-5(6)45-200	200	45	4	27	6	CP(T)-5(6)30-300B	300	30	8	12	10
CP(T)-5(6)55-200	200	55	4	30	7	CP(T)-5(6)30-400B	400	30	8	7	18
CP(T)-5(6)75-200	200	75	4	36	7	CP(T)-5(6)45-400B	400	45	8	9	20
CP(T)-5(6)19-250	250	19	4	11	7	CP(T)-5(6)55-400B	400	55	8	12	20
CP(T)-5(6)22-250	250	22	4	12	7.5	CP(T)-5(6)75-400B	400	75	8	12	25
CP(T)-5(6)30-250	250	30	4	14	8.5	CP(T)-5(6)55-500B	500	55	8	7.5	30
CP(T)-5(6)37-250	250	37	4	17	9	CP(T)-5(6)110-500B	500	110	8	12	36
CP(T)-5(6)45-250	250	45	4	20	9	CP(T)-5(6)150-500B	500	150	8	16	40
CP(T)-5(6)55-250	250	55	4	24	9	CP(T)-5(6)220-500B	500	220	8	22	40

上述規格以外之性能、口徑、馬力、極數，可依客戶需求製作

- Motor with other operating voltage, pole are available on request.
- Inquiry of specific performance or specification is welcome.

All Rights Reserved: GSD INDUSTRIAL CO.,LTD.

性能曲線 (PERFORMANCE CURVE)

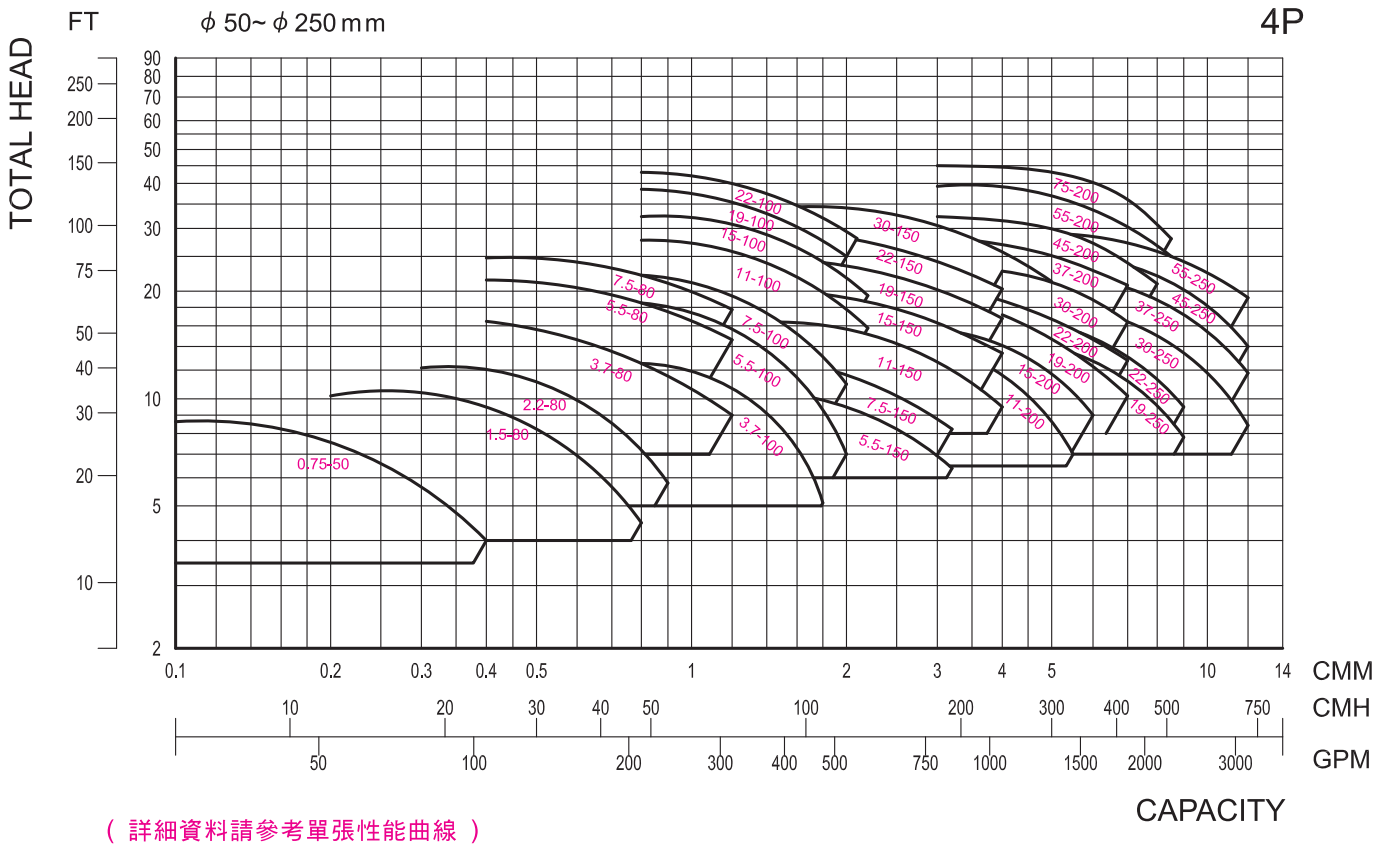

(詳細資料請參考單張性能曲線)

● Detail information , please refer to the specific performance curve sheet

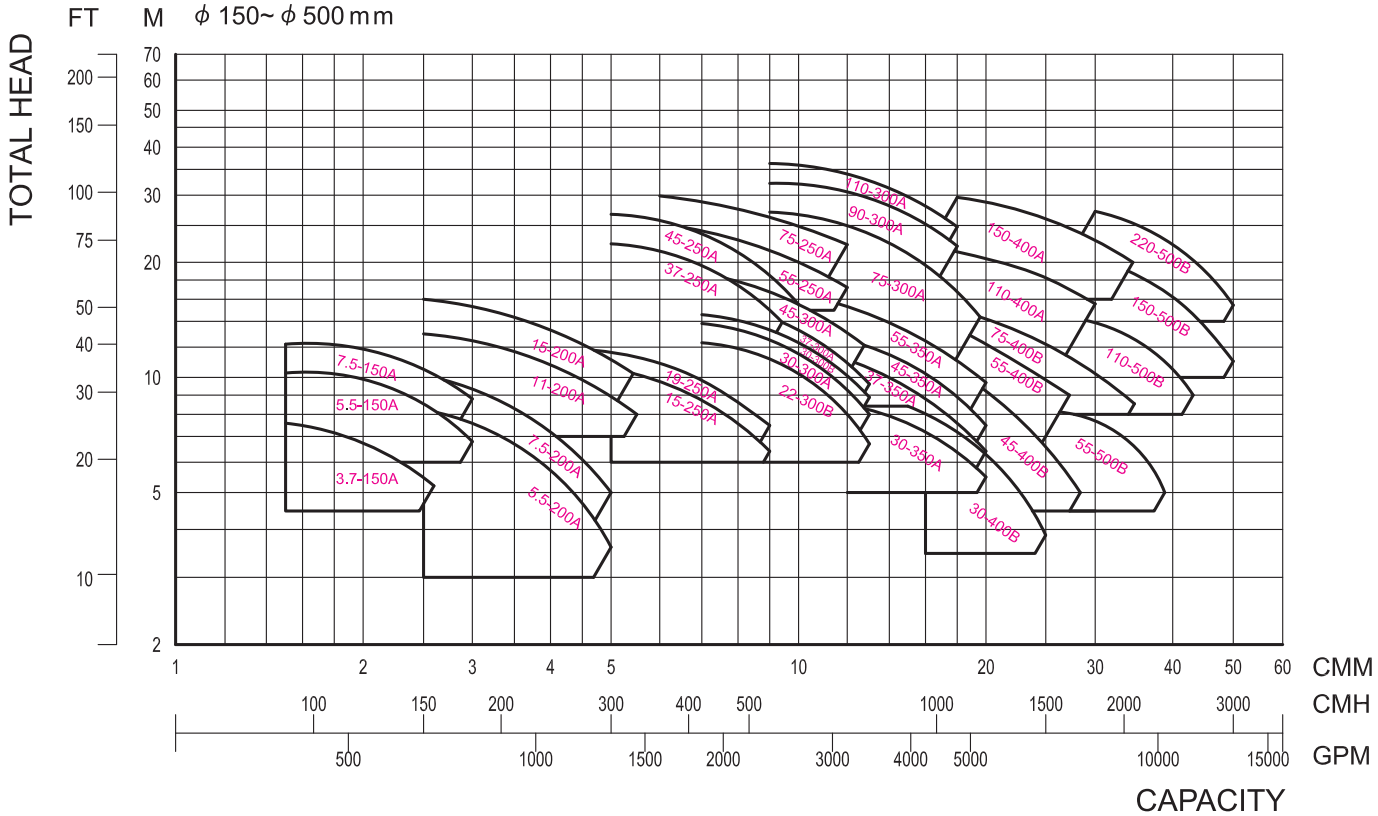

(詳細資料請參考單張性能曲線)

● Detail information , please refer to the specific performance curve sheet

版權所有：川源股份有限公司

結構圖 (CONSTRUCTION)

標準式 (Standard type)

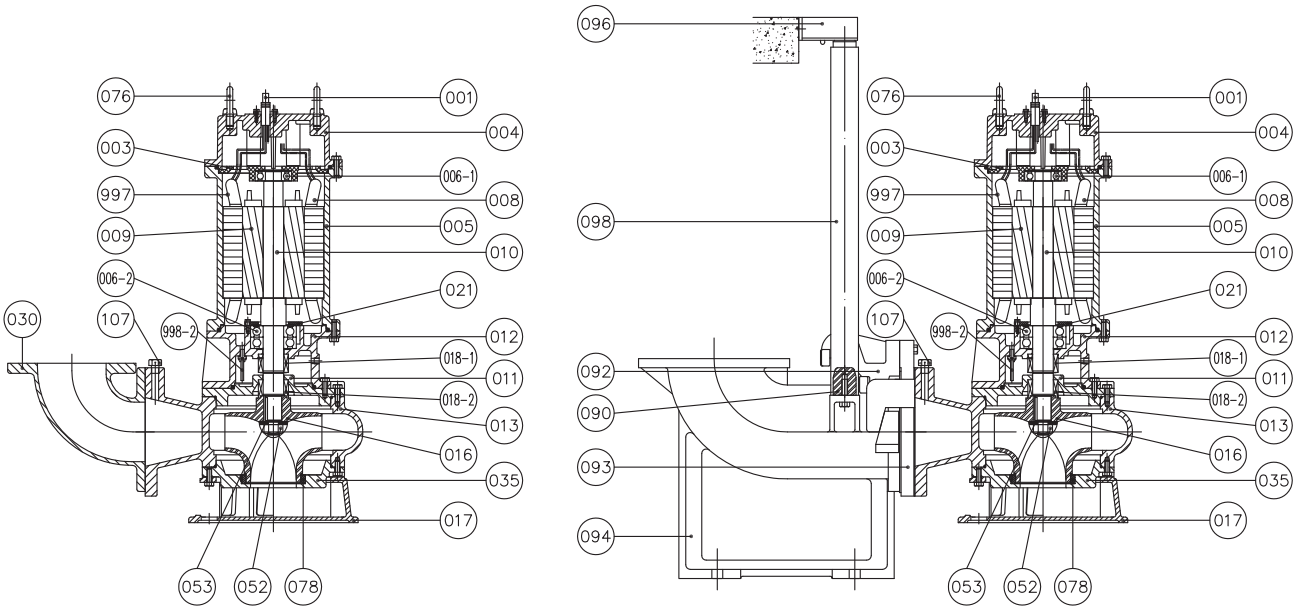

水套式 (Cooling jacket type)

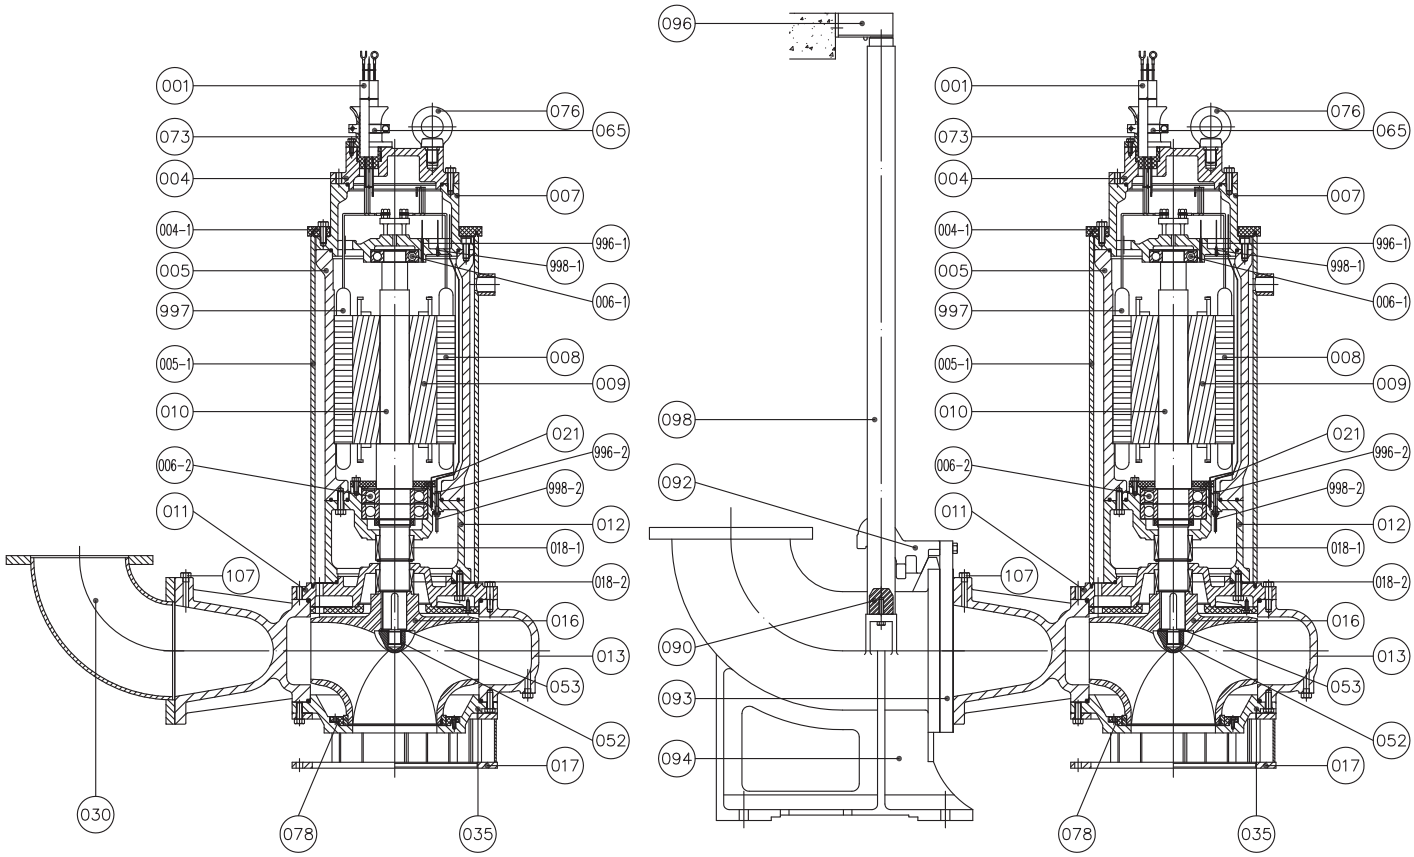

All Rights Reserved: GSD INDUSTRIAL CO.,LTD.

CP(T)沉水式污物(泥)泵

材質表 (MATERIALS)

NO.	名 稱	NAME	MATERIAL			NO.	名 稱	NAME	MATERIAL		
001	電 纜	CABLE	VCT(or 2CT)			003	軸 承 座	BEARING COVER	FC200	FC200	FC200
004	馬 達 蓋	MOTOR COVER	FC200	SCS13	SCS14	004-1	外桶壓蓋	CASING PRESS COVER	FC200	SCS13	SCS14
005	馬達本體	MOTOR CASING	FC200	SCS13	SCS14	005-1	馬達外桶	COOLING HOUSING	SS400	SUS304	SUS316
006-1	軸 承	BEARING	——	——	——	006-2	軸 承	BEARING	——	——	——
007	接 線 座	CABLE COVER	FC200	SCS13	SCS14	008	定 子	STATOR	F CLASS	F CLASS	F CLASS
009	轉 子	ROTOR	——	——	——	010	主 軸	SHAFT	SUS410	SUS304	SUS316
011	油 箱 蓋	OIL COVER	FC200	SCS13	SCS14	012	中 承 座	BRACKET	FC200	SCS13	SCS14
013	泵浦本體	PUMP CASING	FC200	SCS13	SCS14	016	葉 輪	IMPELLER	FC200	SCS13	SCS14
017	濾 底 座	STRAINER	FC200 SS400	SCS13 SUS304	SCS14 SUS316	018-1	機械軸封	MECHANICAL SEAL	CARBON-NBR	CARBON-NBR	CARBON-NBR
018-2	機械軸封	MECHANICAL SEAL	Silicon-NBR	Silicon-NBR	SIL.-VITON	021	軸 承 蓋	BEARING COVER	FC200	FC200	FC200
030	彎 頭	DISCHARGE BEND	FC200 SS400	SCS13 SUS304	SCS14 SUS316	035	泵浦底蓋	BOTTOM COVER	FC200	SCS13	SCS14
052	葉輪螺帽	IMPELLER NUT	SUS304	SUS304	SUS316	053	防鬆墊圈	WASHER	SUS304	SUS304	SUS316
065	電纜壓蓋	CABLE COVER	FC200	SCS13	SCS14	073	電纜固定套	CABLE BOX	FC200	SCS13	SCS14
076	環首螺栓	EYE BOLT	SS400 ； SUS304			078	磨 耗 環	WEAR RING	鍍鉻	BC6	BC6
090	固 定 栓	BOLT	FC200	FC200	FC200	092	引 導 板	SLIDE	FC200	SCS13	SCS14
093	配合凸緣	FLANGE SETTER	FC200	SCS13	SCS14	094	著脫本體	AUTO-SETTER	FC200	SCS13	SCS14
096	固 定 板	GUIDE SUPPORT	SS400 ； FC200			098	著脫導桿	RAIL PIPING	SGP ； SUS304		
107	排 氣 閥	VENT VALVE	PP			996-1	上軸承溫度偵測器	BEARING THERMAL DETECTOR	選擇配備 (OPTIONAL)		
996-2	下軸承溫度偵測器	BEARING THERMAL DETECTOR	選擇配備 (OPTIONAL)			997	線圈過熱保護裝置	COIL THERMAL PROTECTOR	選擇配備 (OPTIONAL)		
998-1	測漏檢知器	LEAKAGE DETECTOR	選擇配備 (OPTIONAL)			998-2	測漏檢知器	LEAKAGE DETECTOR	選擇配備 (OPTIONAL)		

● 上述材質以外，及特殊塗裝，可依客戶需求製作。
● 098 、 996 、 997 、 998 爲選擇配備 (OPTIONAL) 。
● 3HP(含) 以下馬達本體採 SUS304 不銹鋼沖壓外殼。 (material of motor casing for the pump under 3HP is SUS304)

尺寸表 (DIMENSIONS)

Units ： mm

型式(TYPE)	FIG	A	B	C	D	E	F	G	H	型式(TYPE)	FIG	A	B	C	D	E	F	G	H
CP-60.75-50	1	166	366	494	196	96	—	245	285	CP-63.7-150A	1	420	660	879	477	236	320	716	856
CP-61.5-80	1	270	481	609	291	145	190	413	490	CP-65.5-150A	1	420	760	1011	477	236	320	716	856
CP-62.2-80	1	270	521	649	291	145	190	413	490	CP-67.5-150A	1	420	760	1011	477	236	320	716	856
CP-63.7-80	1	320	579	805	384	185	260	538	630	CP-65.5-200A	1	510	800	1064	513	254	390	859	1024
CP-65.5-80	1	320	579	805	384	185	260	538	630	CP-67.5-200A	1	510	800	1064	513	254	390	859	1024
CP-67.5-80	1	320	579	805	384	185	260	538	630	CP-611-200A	3	510	900	1280	513	254	390	859	1024
CP-63.7-100	1	312	579	805	384	185	260	570	675	CP-615-200A	3	510	900	1280	513	254	390	859	1024
CP-65.5-100	1	312	579	805	384	185	260	570	675	CP-615-250A	3	695	930	1285	602	303	450	1150	1350
CP-67.5-100	1	312	579	805	384	185	260	570	675	CP-619-250A	3	695	930	1285	602	303	450	1150	1350
CP-611-100	1	315	680	939	389	205	280	610	715	CP-637-250A	3	794	1185	1687	617	302	480	1184	1384
CP-615-100	1	315	680	939	389	205	280	610	715	CP-645-250A	3	794	1185	1687	617	302	480	1184	1384
CP-619-100	3	335	750	1109	460	235	295	690	830	CP-655-250A	3	794	1317	1864	709	356	550	1308	1508
CP-622-100	3	335	750	1109	460	235	295	690	830	CP-675-250A	3	794	1317	1864	709	356	550	1308	1508
CP-65.5-150	1	380	620	840	410	202	300	662	802	CP-630-300A	3	873	1180	1638	763	353	550	1367	1590
CP-67.5-150	1	380	620	840	410	202	300	662	802	CP-637-300A	3	873	1200	1693	763	353	550	1367	1590
CP-611-150	1	371	710	955	413	205	295	660	800	CP-645-300A	3	873	1200	1693	763	353	550	1367	1590
CP-615-150	1	371	710	955	413	205	295	660	800	CP-675-300A	3	873	1200	1693	763	353	550	1367	1590
CP-619-150	3	420	830	1227	477	236	320	716	856	CP-690-300A	3	872	1415	2037	758	381	540	1385	1608
CP-622-150	3	420	830	1227	477	236	320	716	856	CP-6110-300A	3	872	1415	2037	758	381	540	1385	1608
CP-630-150	3	420	1020	1456	477	236	320	716	856	CP-630-350A	3	978	1230	1697	798	404	600	1544	1789
CP-611-200	1	510	800	1064	513	254	390	859	1024	CP-637-350A	3	978	1250	1767	798	404	600	1544	1789
CP-615-200	1	510	800	1064	513	254	390	859	1024	CP-645-350A	3	978	1250	1767	798	404	600	1544	1789
CP-619-200	3	510	900	1280	513	254	390	859	1024	CP-655-350A	3	978	1430	1947	798	404	600	1544	1789
CP-622-200	3	510	900	1280	513	254	390	859	1024	CP-6110-400A	3	932	1740	2280	800	400	550	1363	1643
CP-630-200	3	510	1020	1509	513	254	390	859	1024	CP-6150-400A	3	932	1860	2410	850	425	600	1438	1718
CP-637-200	3	510	1020	1509	513	254	390	859	1024	CP-622-300B	3	872	1350	1873	758	381	540	1385	1608
CP-645-200	3	510	1020	1559	513	254	390	859	1024	CP-630-300B	3	872	1350	1873	758	381	540	1385	1608
CP-655-200	3	510	1020	1559	513	254	390	859	1024	CP-630-400B	3	1070	1490	2021	892	452	650	1718	1998
CP-675-200	3	630	1340	1872	617	302	480	997	1162	CP-645-400B	3	1070	1540	2117	892	452	650	1718	1998
CP-619-250	3	695	930	1285	602	303	450	1150	1350	CP-655-400B	3	1070	1540	2117	892	452	650	1718	1998
CP-622-250	3	695	930	1285	602	303	450	1150	1350	CP-675-400B	3	1070	1540	2117	892	452	650	1718	1998
CP-630-250	3	695	1070	1525	602	303	450	1150	1350	CP-655-500B	3	1400	1530	2040	990	500	700	1715	2053
CP-637-250	3	695	1070	1525	602	303	450	1150	1350	CP-6110-500B	3	1400	1760	2300	1215	515	750	1780	2118
CP-645-250	3	695	1000	1597	602	303	450	1150	1350	CP-6150-500B	3	1400	1880	2430	1042	540	750	1805	2143
CP-655-250	3	695	1000	1597	602	303	450	1150	1350	CP-6220-500B	3	1400	2000	2550	1042	540	750	1805	2143

● CP 重量請參考第六頁 CT 泵重。 ● 50HZ 外型尺寸請另外索取。

版權所有：川源股份有限公司

尺寸表 (DIMENSIONS)

Units : mm

型式(TYPE)	FIG	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	泵重 kg
CT-60.75-50	2	310	396	524	196	96	—	130	535	120	150	110	180	30	25A	59	240	140	15	M12	2.5	24
CT-61.5-80	2	280	501	629	291	145	263	140	626	180	200	180	225	20	25A	59	240	140	15	M16	21.5	55
CT-62.2-80	2	280	541	669	291	145	263	140	626	180	200	180	225	20	25A	59	240	140	15	M16	21.5	63
CT-63.7-80	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	122
CT-65.5-80	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	140
CT-67.5-80	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	145
CT-63.7-100	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	120
CT-65.5-100	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	140
CT-67.5-100	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	145
CT-611-100	2	340	685	947	389	205	379	156	845	180	220	180	240	8	40A	65	345	295	25	M16	54	190
CT-615-100	2	340	685	947	389	205	379	156	845	180	220	180	240	8	40A	65	345	295	25	M16	54	225
CT-619-100	4	445	870	1229	460	235	440	225	1040	225	250	240	380	120	50A	100	470	400	25	M20	22	320
CT-622-100	4	445	870	1229	460	235	440	225	1040	225	250	240	380	120	50A	100	470	400	25	M20	22	430
CT-65.5-150	2	445	695	915	410	202	445	225	1012	225	250	240	380	75	50A	100	470	400	25	M20	22	170
CT-67.5-150	2	445	695	915	410	202	445	225	1012	225	250	240	380	75	50A	100	470	400	25	M20	22	180
CT-611-150	2	445	795	1039	413	205	440	225	1010	225	250	240	380	84	50A	100	470	400	25	M20	22	220
CT-615-150	2	445	795	1039	413	205	440	225	1010	225	250	240	380	84	50A	100	470	400	25	M20	22	250
CT-619-150	4	445	865	1262	477	236	465	225	1066	225	250	240	380	35	50A	100	470	400	25	M20	22	365
CT-622-150	4	445	865	1262	477	236	465	225	1066	225	250	240	380	35	50A	100	470	400	25	M20	22	480
CT-630-150	4	445	1055	1491	477	236	465	225	1066	225	250	240	380	35	50A	100	470	400	25	M20	22	665
CT-611-200	2	480	840	1105	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	260
CT-615-200	2	480	840	1105	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	330
CT-619-200	4	480	940	1321	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	485
CT-622-200	4	480	940	1321	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	500
CT-630-200	4	480	1060	1550	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	685
CT-637-200	4	480	1060	1550	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	695
CT-645-200	4	480	1060	1600	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	710
CT-655-200	4	480	1060	1600	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	860
CT-675-200	4	480	1260	1792	617	302	633	285	1385	290	330	300	470	-80	50A	100	470	400	25	M20	22	1010
CT-619-250	4	700	1050	1405	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	540
CT-622-250	4	700	1050	1405	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	560
CT-630-250	4	700	1190	1645	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	740
CT-637-250	4	700	1190	1645	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	765
CT-645-250	4	700	1120	1717	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	780
CT-655-250	4	700	1120	1717	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	900
CT-63.7-150A	2	445	695	914	477	236	465	225	1066	225	250	240	380	35	50A	100	470	400	25	M20	22	210
CT-65.5-150A	2	445	795	1046	477	236	465	225	1066	225	250	240	380	35	50A	100	470	400	25	M20	22	255
CT-67.5-150A	2	445	795	1046	477	236	465	225	1066	225	250	240	380	35	50A	100	470	400	25	M20	22	310
CT-65.5-200A	2	480	840	1105	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	270
CT-67.5-200A	2	480	840	1105	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	340
CT-611-200A	4	480	940	1321	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	400
CT-615-200A	4	480	940	1321	513	254	543	285	1247	290	330	300	470	41	50A	100	470	400	25	M20	22	480
CT-615-250A	4	700	1050	1405	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	520
CT-619-250A	4	700	1050	1405	602	303	650	370	1523	480	550	480	680	120	65A	125	570	500	40	M20	88	700
CT-637-250A	4	700	1210	1712	617	302	680	370	1552	480	550	480	680	25	65A	125	570	500	40	M20	88	850
CT-645-250A	4	700	1210	1712	617	302	680	370	1552	480	550	480	680	25	65A	125	570	500	40	M20	88	1000
CT-655-250A	4	700	1345	1892	709	356	750	370	1676	480	550	480	680	28	65A	125	570	500	40	M20	88	1160
CT-675-250A	4	700	1345	1892	709	356	750	370	1676	480	550	480	680	28	65A	125	570	500	40	M20	88	1360
CT-630-300A	4	800	1235	1692	763	353	747	410	1733	500	600	550	700	54	65A	125	570	500	40	M20	175	865
CT-637-300A	4	800	1255	1747	763	353	747	410	1733	500	600	550	700	54	65A	125	570	500	40	M20	175	890
CT-645-300A	4	800	1255	1747	763	353	747	410	1733	500	600	550	700	54	65A	125	570	500	40	M20	175	1010
CT-675-300A	4	800	1255	1747	763	353	747	410	1733	500	600	550	700	54	65A	125	570	500	40	M20	175	1390
CT-6110-300A	4	800	1470	2092	758	381	737	410	1751	500	600	550	700	55	65A	125	570	500	40	M20	175	1500
CT-630-350A	4	900	1320	1785	798	404	850	430	1929	530	650	600	750	88	80A	180	740	670	37	M24	170	925
CT-637-350A	4	900	1350	1865	798	404	600	540	1789	530	650	600	750	98	80A	180	740	670	37	M24	170	950
CT-645-350A	4	900	1350	1865	798	404	600	540	1789	530	650	600	750	98	80A	180	740	670	37	M24	170	1070
CT-655-350A	4	900	1530	2045	798	404	600	540	1789	530	650	600	750	98	80A	180	740	670	37	M24	170	1120
CT-6110-400A	4	1050	1795	2335	800	400	620	600	1900	600	750	800	950	55	80A	180	740	670	37	M24	234	1750
CT-6150-400A	4	1050	1865	2415	850	425	645	600	1950	600	750	800	950	5	80A	180	740	670	37	M24	234	2050
CT-622-300B	4	800	1405	1928	758	381	737	410	1751	500	600	550	700	55	65A	125	570	500	40	M20	175	890
CT-630-300B	4	800	1405	1928	758	381	737	410	1751	500	600	550	700	55	65A	125	570	500	40	M20	175	1025
CT-630-400B	4	1050	1655	2187	892	452	870	600	2202	600	750	800	950	166	80A	180	740	670	37	M24	234	1080
CT-645-400B	4	1050	1595	2172	892	452	620	600	1952	600	750	800	950	55	80A	180	740	670	37	M24	234	1220
CT-655-400B	4	1050	1595	2172	892	452	620	600	1952	600	750	800	950	55	80A	180	740	670	37	M24	234	1360
CT-675-400B	4	1050	1545	2122	892	452	620	600	1952	600	750	800	950	5	80A	180	740	670	37	M24	234	1650
CT-655-500B	4	1400	1770	2280	990	500	950	800	2588	650	800	800	900	240	80A	185	450	250	50	M30	362	1850
CT-6110-500B	4	1400	1960	2500	1215	515	950	800	2603	650	800	800	900	200	80A	185	450	250	50	M30	362	2000
CT-6150-500B	4	1400	2080	2630	1042	540	950	800	2628	650	800	800	900	200	80A	185	450	250	50	M30	362	2300
CT-6220-500B	4	1400	2200	2750	1042	540	950	800	2628	650	800	800	900	200	80A	185	450	250	50	M30	362	2850

● 泵重不含著脫。 (the weight of pump is not including the auto-setter)

● 50HZ 外型尺寸請另外索取。

All Rights Reserved: GSD INDUSTRIAL CO.,LTD.

外型尺寸圖 (DIMENSIONS)

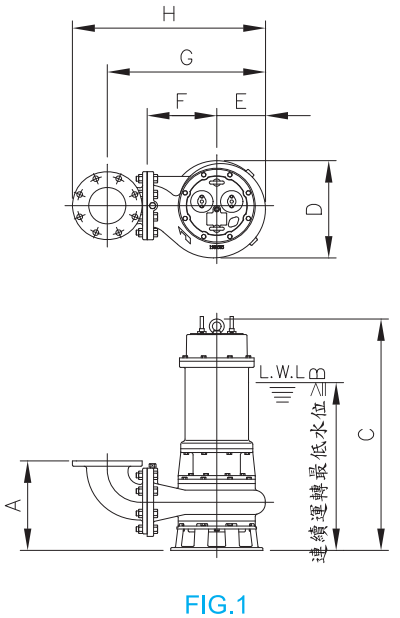

FIG.1

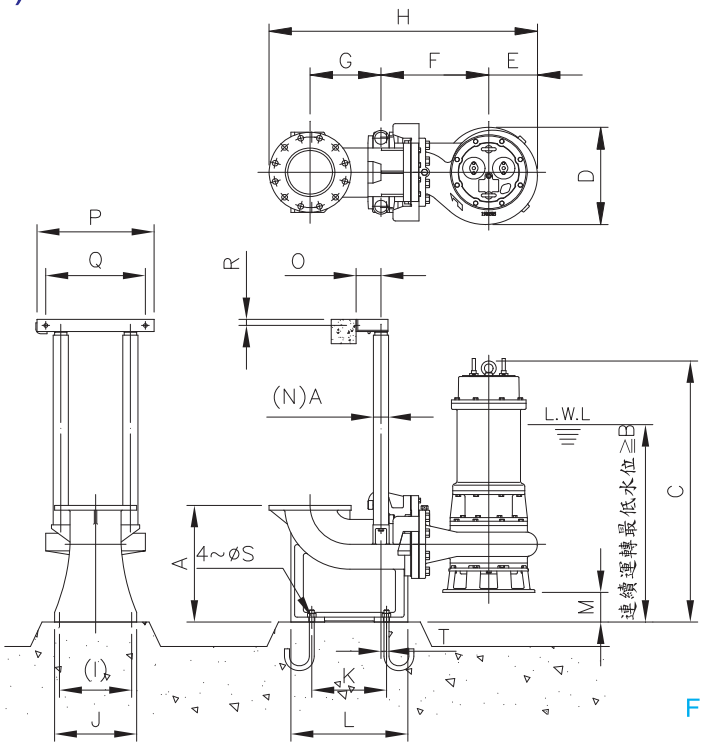

FIG.2

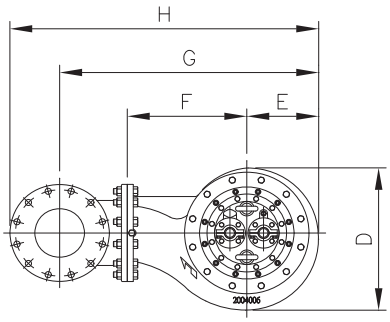

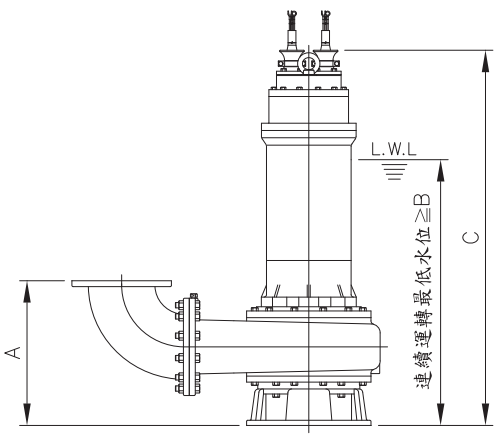

FIG.3

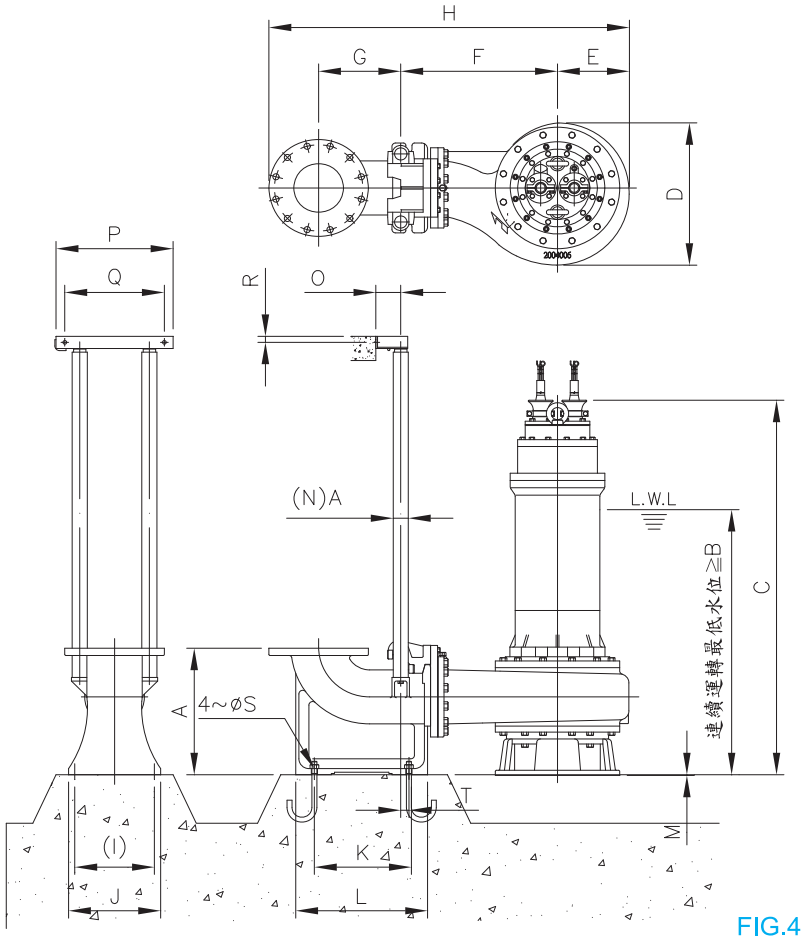

FIG.4

註：“L.W.L.”為最低使用水位

● "L.W.L." the lowest operation water level

※以上性能以外之需求，可依客戶需求製作

經銷商

※本型錄內容如有變更恕不另行通知

Contents of the catalogue are subject to change wlthout notice

川源股份有限公司 GSD INDUSTRIAL CO., LTD.
新北市汐止區環河街206號 +886 2 26942732
No.206, Huanhe St., Xizhi Dist., New Taipei City 22154, Taiwan (R.O.C.)